

# SUBLIFT

BY SWEDE SHIP

25t

THE SAFE, COMPACT, SELF-PROPELLED SUBMERISBLE BOAT HOIST




The SUBLIFT 25t is a workhorse used by marinas and boat clubs with a wide range of boats. It is equipped with slings on two pairs of hydraulic lifting arms. The hoist is designed for up to 25 ton boats.

[www.sublift.se](http://www.sublift.se)


# Sublift 25t

Submersible | Flexible width | Remote controlled | Safe and fast

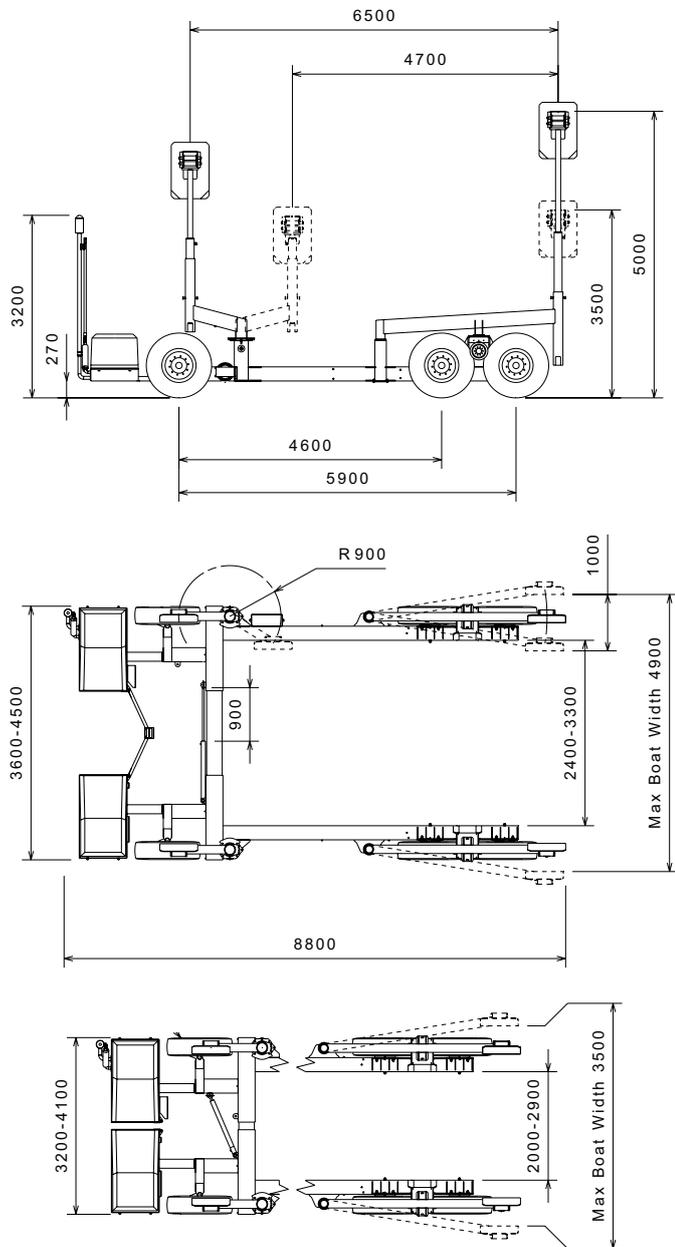

Drawings are subject to change without prior notice.

- SUBLIFT 25t is designed for a maximum boat load of 25 ton and maximum width of 4.9 m
- All functions are accessible from the remote control
- Transmission on the 4 rear wheels is fully hydraulic powered
- The speed from slow crawling, in "turtle" mode, up to walking pace, in "rabbit" mode, is steplessly controlled
- Electric sling locks are available as option



## Sublift 25t - Data

Service weight:	7 200 kg
Max load:	25 000 kg
Max load/sling front:	10 000 kg
Max load/sling rear:	15 000 kg
Highest slope:	1/8
Max side slope:	1/15
Engine:	Kubota 36 kW
Max speed:	6 km/h



- The lifting height and optionally width are adjustable by hydraulics
- Actual load on each sling is displayed in the remote control
- The hoist is protected with hot dip galvanizing, epoxy primer and a polyurethane coating
- Wheel axles and hubs have special seals that prevents water penetration

